

TRLR1100U Technical Data			
Gross Vehicle Weight Rating (GVWR) — 68,000 lbs (30,844 kg)	Tire Size — 215/75R17.5 LR-H		
Gross Axle Weight Rating (GAWR) — 18,000 lbs (8,165 kg) (ea.)	Wheel Bolt Pattern — 8 Lug		
Tire Load Rating — 4,805 lbs (each)	Dimensions — Reverse Page		

STANDARD TRAILER EQUIPMENT


- Fits MQ Power Generator Model DCA1100SSC
- Tandem-axle Dual Wheel Design with Hendrickson Suspension
- H.D. Welded Steel Frame Construction
- I-Beam for Generator Mounting and Support
- Tandem Jacks with 2-Speed Mechanism; 50,000 pound Capacity
- Air Braking System with ABS

- Utility Black Enamel Finish with Primer Under Coat
- D.O.T. Approved Tail Lamps, Stop Lamps, Turn Signal Lamps, Side Marker Lamps
- Emergency Spring Brake Parking Feature
- Aluminum Tube Outriggers on Each Side



OPTIONAL TRAILER EQUIPMENT

- Folding Platforms for Ease of Service
- 1,600 Gallon Fuel Cell DCA1100SSC UL142 Certified Double-wall Steel Design
- Front and Rear Easy Step Access with Handrails on Both Sides
- Guard Rail System
- Bolt-On Steps

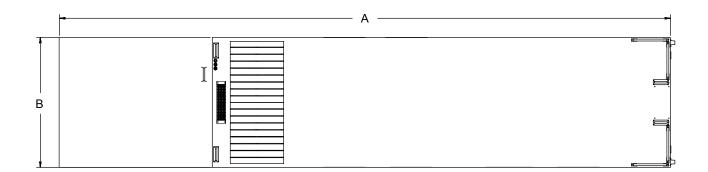




Trailer Dimensions			
Α	В	С	D
480 in. (12.19 m)	102 in (2.59 m)	60 in. (1.5 m)	39.5 in (1.0 m)

Trailer Weight			
Without Fuel	With 1600 Gal. Fuel Cell		
13,159 lbs. (5,968 kg)*	16,665 lbs (7,559 kg) for DCA1100SSC		

*Weight is approximate



© COPYRIGHT 2016 MULTIQUIP INC. TRLR1100U Rev. #0 (11/03/16)



MULTIQUIP
POST OFFICE BOX 6254
CARSON, CA 90749
310-537-3700 • 800-883-2551
FAX: 310-604-3831
E-MAIL: sales@multiquip.com
WEBSITE: www.multiquip.com