




TRLR600ZBP2

Triple Axle Trailer

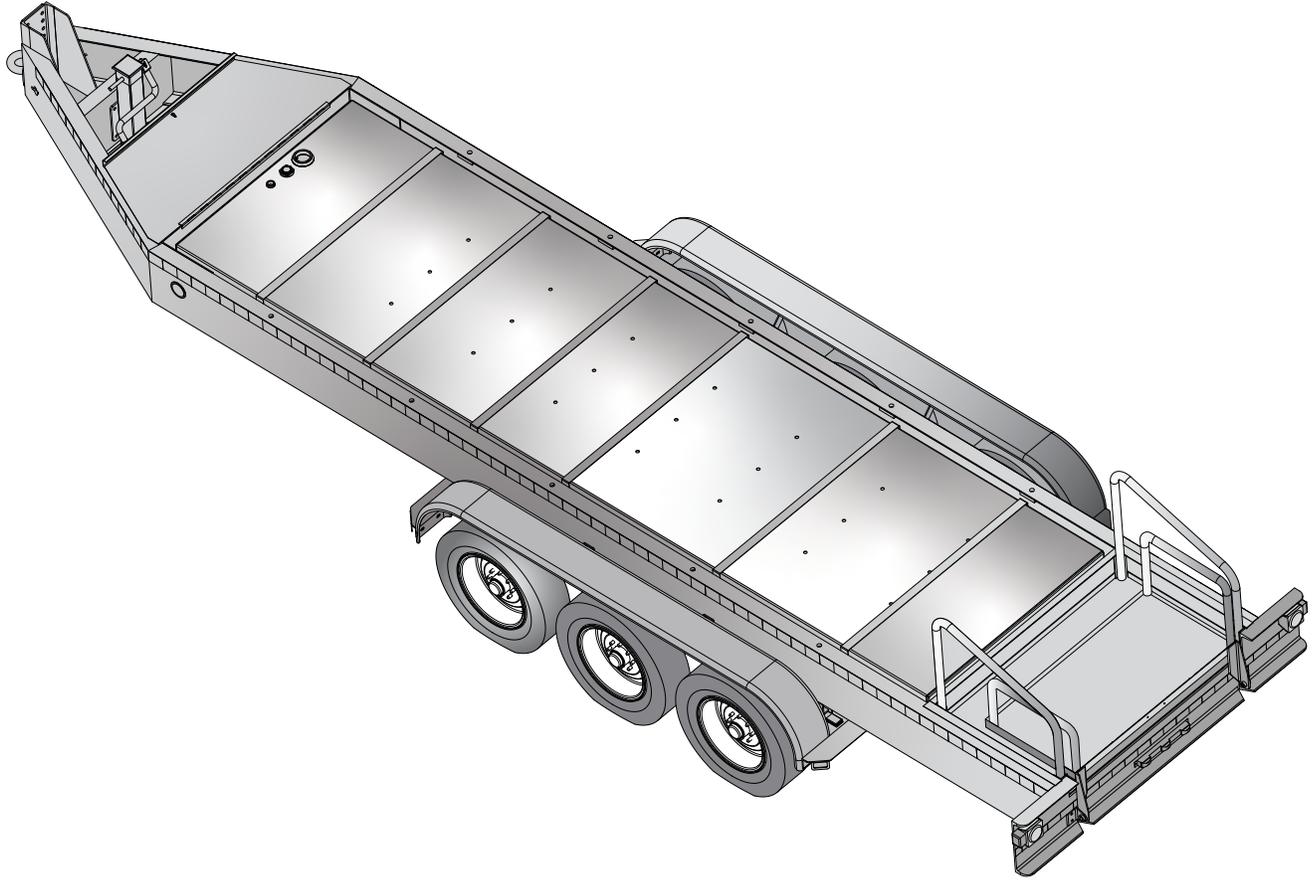

TRLR600ZBP2 Technical Data	
Gross Vehicle Weight Rating (GVWR) — 34,000 lbs (15,422 kg)	Tire Size — 235/75R17.5 LR-J
Gross Axle Weight Rating (GAWR) — 12,000 lbs (5,443 kg) (ea.)	Wheel Bolt Pattern — 8 x 6.5
Pintle Eye Coupler Rating — 30,000 lbs (13,608 kg)	Tire Load Rating — 4,805 lbs (2,180 kg) ea.
	Dimensions — See reverse page

STANDARD TRAILER EQUIPMENT

- Fits MQ Power Generator Model DCA600SSV4F
- Straight Triple-Axle Design with Leaf Spring Suspension
- Welded Steel Frame Construction
- Structural Channel for Generator Mounting and Support
- Integral Fuel Cell; Single-Wall Steel Design, 600-gallon/2,271-liter Capacity
- Electric-actuated Drum Brakes (all axles)
- Coupler bolting plate allows 6-positions
- Heavy-duty Tongue Mounted, Drop-leg Jack (rated 12,000 lbs. lift capacity)
- Replaceable Bolt-on Steel Fenders
- High-gloss Enamel Coated Frame, Channel, Actuator and Fenders
- D.O.T. Approved Tail Lamps, Stop Lamps, Turn Signal Lamps, Side Marker Lamps
- Weatherproof, 3-piece Trailer Light Wiring Harness
- Built-in, Heavy-Duty, Pull-down Platform





TRLR600ZBP2

Triple Axle Trailer

OPTIONAL TRAILER EQUIPMENT

- Electric Breakaway Safety Device
- Anti-Theft Wheel Lock
- Front and Rear Stabilizer Jacks
- Spare Tire with Locking Mount

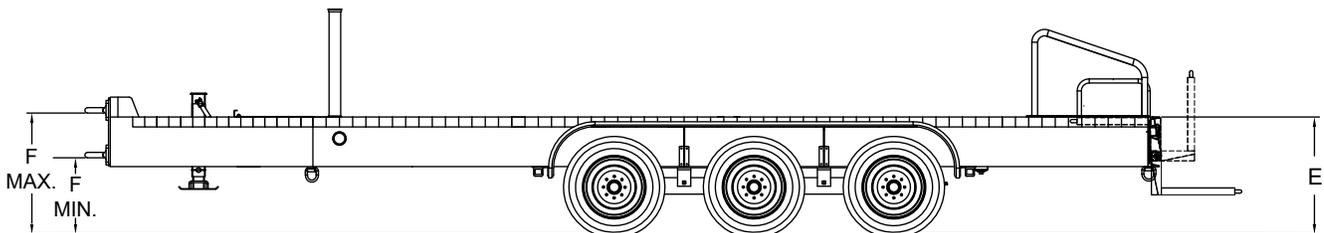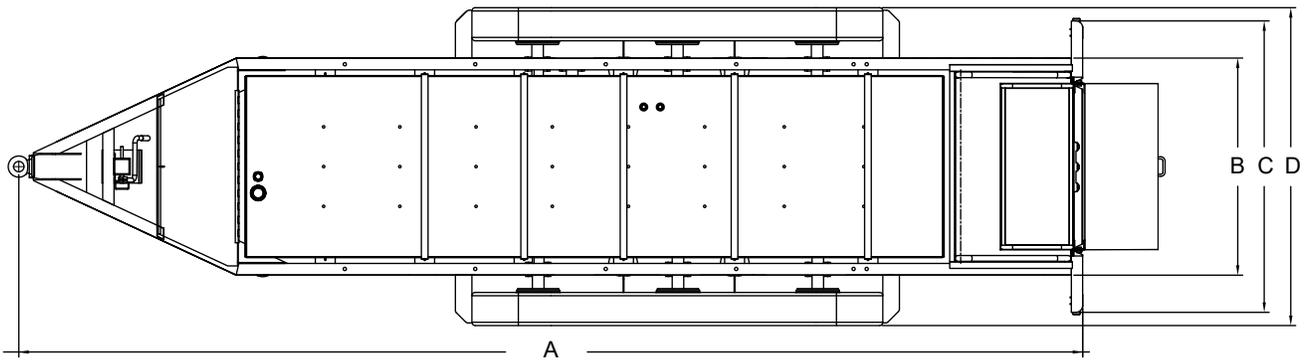

Trailer Dimensions						
A	B	C	D	E	F	
					Min	Max
321 in. (8,153 mm)	65.56 in. (1,664.46 mm)	88 in. (2,235 mm)	96 in. (2,438.4 mm)	35.39 in. (899 mm)	23.08 in. (586.23 mm)	36.58 in. (929.13 mm)

Trailer Only Weight	
Without Fuel	With Fuel
7,238 lbs. (3,283 kg)*	10,838 lbs (4,916 kg)*

*Weight is approximate

