

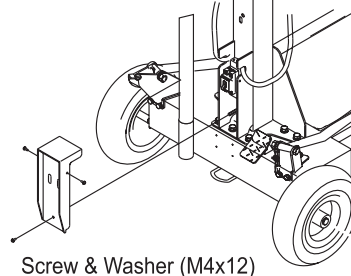


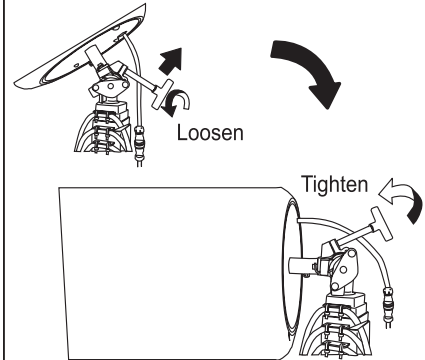

GloBug Model GB114BC

Assembly Instructions

The following instructions are intended to assist the user in the assembly of the GloBug Model GB114BC. Please read the instructions before assembling. Wear the proper protective clothing, steel-toed boots and other protective devices required by the job.

ITEMS		TOOLS	
<input type="checkbox"/> T-HANDLE  <input type="checkbox"/> BALLOON  <input type="checkbox"/> CART 	<input type="checkbox"/> SWITCH COVER  <input type="checkbox"/> INSTRUCTION MANUAL  <input type="checkbox"/> SCREW & WASHER (M4x12) x 3 <input type="checkbox"/> BOLT & WASHER (M10x25) x 7 <input type="checkbox"/> BOLT & WASHER (M12x25) x 1 <input type="checkbox"/> WASHER (12dx40Dx3.2t) x 1 	<input type="checkbox"/> RATCHET WRENCH <input type="checkbox"/> WRENCH SOCKET (SIZE: 17mm, 19mm) <input type="checkbox"/> HEXAGON WRENCH (SIZE: 5mm)	
1 Attach the T-handle to the cart.  Washer (12dx40Dx3.2t) Bolt & Washer (M12x25) Tighten bolt between 21-28 ft-lb.	2 Secure the mast to the cart.  Bolt & Washer (M10x25) Tighten bolt between 18-24 ft-lb.	3 Join the connectors.  Connector	
4 Attach the switch cover to the mast.  Screw & Washer (M4x12)	5 Secure the balloon to the mast and connect the power cables.  Set Screw (M10x25) Tighten the set screw securely. Click!	6 Lay down the balloon and tighten the adjust lever.  Loosen Tighten	

