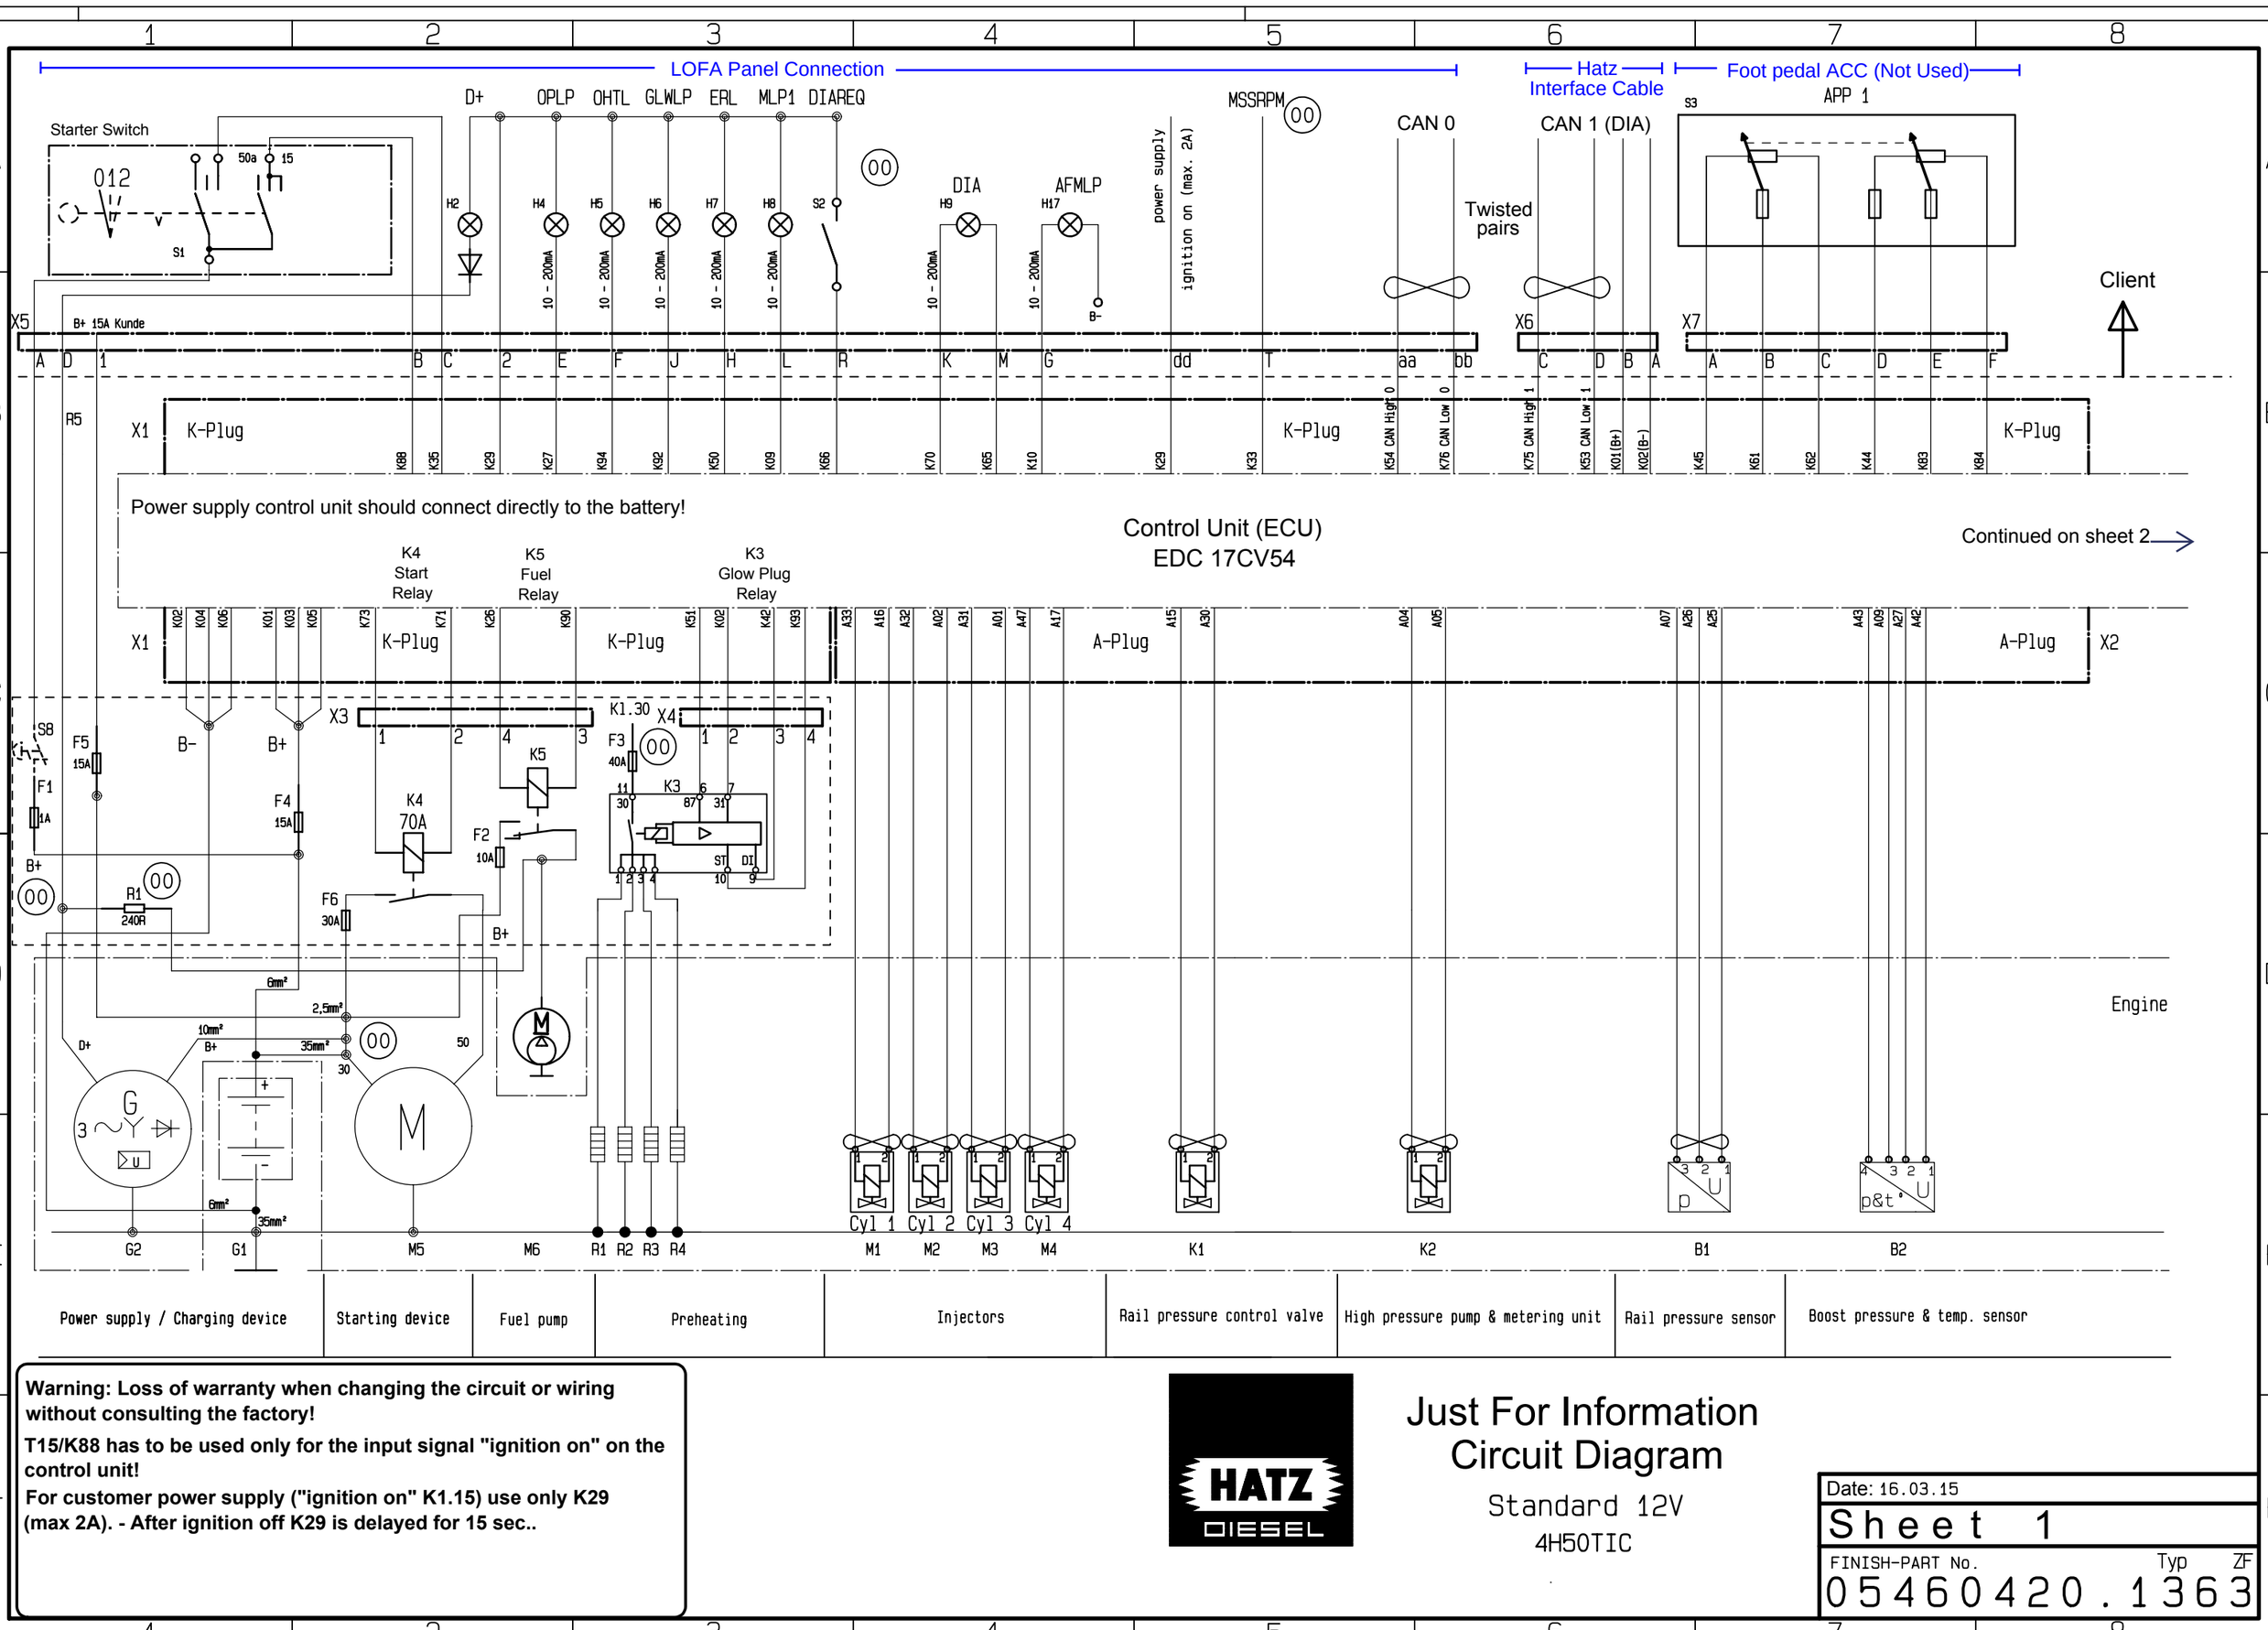

Warning: Loss of warranty when changing the circuit or wiring without consulting the factory!

T15/K88 has to be used only for the input signal "ignition on" on the control unit!

For customer power supply ("ignition on" K1.15) use only K29 (max 2A). - After ignition off K29 is delayed for 15 sec..

HATZ DIESEL

Just For Information Circuit Diagram

Standard 12V

4H50TIC

Date: 16.03.15

Sheet 1

FINISH-PART No. Typ ZF

05460420.1363