



# MQD2HA

## MULTIQUIP® 2" Diaphragm Pump

GALLONS PER MINUTE

**50 (189.27 L)**

HEAD

**25 ft (7.62 M)**

ENGINE

**Honda GX120**



### APPLICATIONS

Agricultural, Construction Sites, Dirty Water (muddy, silt, sand, sludge and sewage water), Emergency Response, Excavation, Farms, Floods, Irrigation, Jobsite Drainage, Mining, Municipalities, Septic Tanks, Site Preparation, Standing Water, Water Departments, Water Supply from Lakes/Rivers

### STANDARD FEATURES

- Maximum pumping capacity of **50 gallons (189 liters)** per minute.
- Maximum lift of **25 feet (7.6 meters)**.
- Sand-cast aluminum construction for durability.
- **2" NPT suction and discharge ports.**
- Pumps water with solid content as large as **1-1/4" (41.275 mm)** in diameter.
- High-Efficiency diaphragm for maximum fluid transfer.
- **2-stage heavy duty forged gear** driven transmission designed to operate pump at **60 strokes per minute.**
- Easy maintenance and cleanout.
- Dual check valve - one each for suction and discharge ports.
- Handles fluids up to **180° F (82° C)**.
- Can run dry without damage.
- **90° rotatable base.**
- Trusted **3.5HP Honda GX120 gasoline engine.**
- Engine oil-alert to protect the engine in the case of low engine oil.
- Heavy-duty wheel kit and tubular steel handle for ease of transportation.

### WARRANTY\*


MQD2HA: 24 months from date of purchase.

Honda GX120 Engine: 36 months from date of purchase.


Hoses: 3 months from date of purchase.

\*Refer to the MULTIQUIP NEW PRODUCT LIMITED WARRANTY FOR FULL TERMS AND CONDITIONS.


## FEATURES

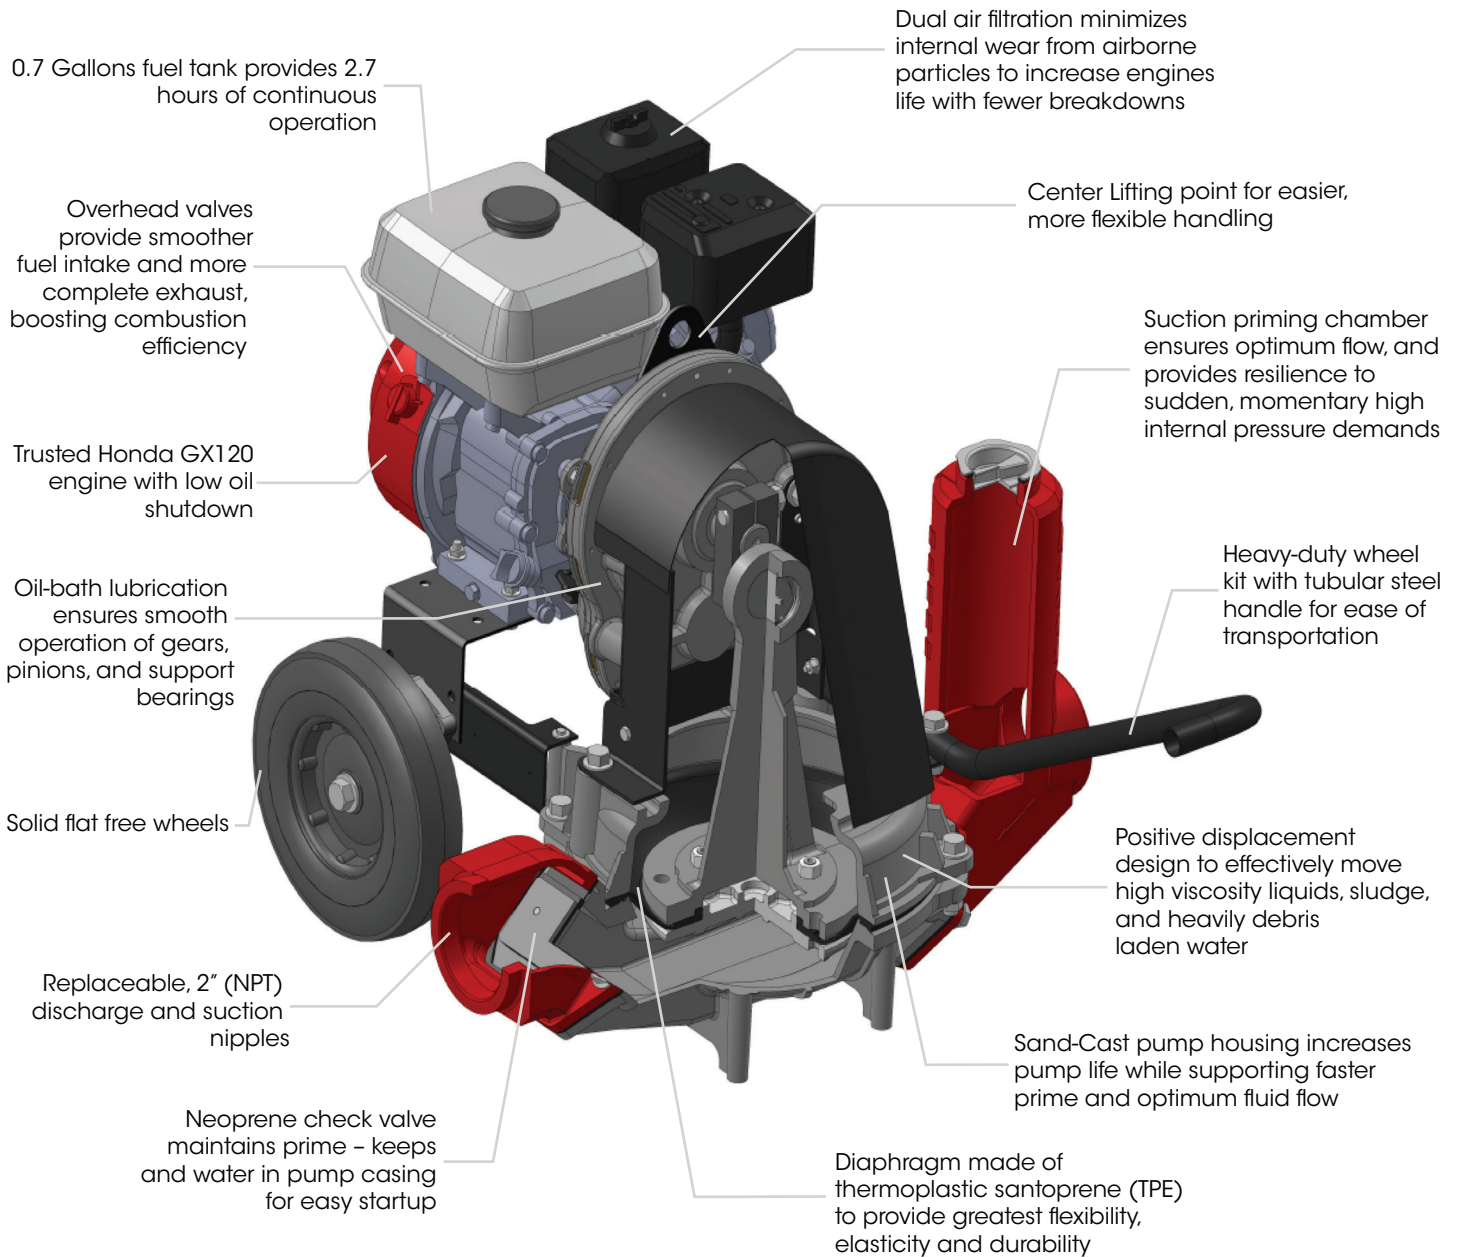

## PUMP CURVE

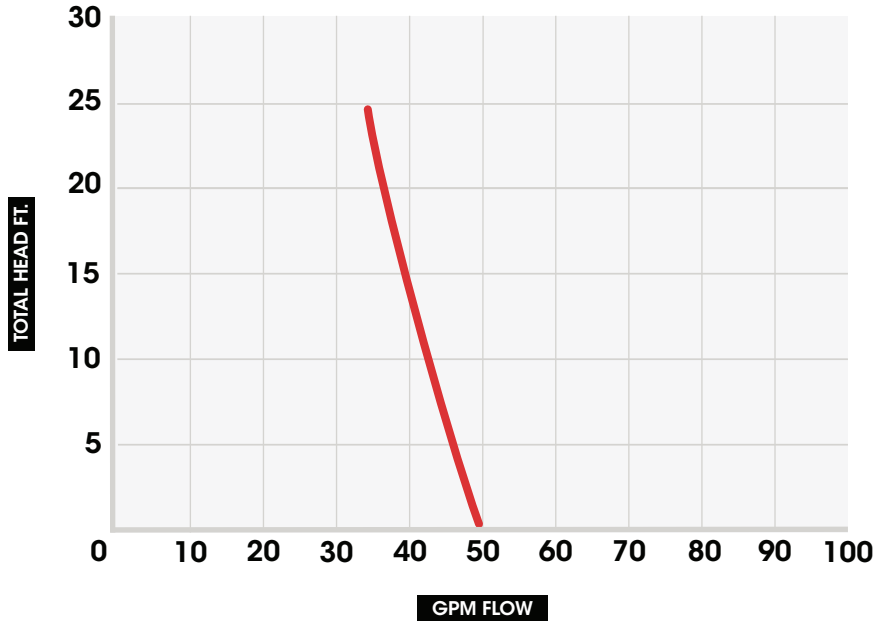

## PUMP DIMENSIONS

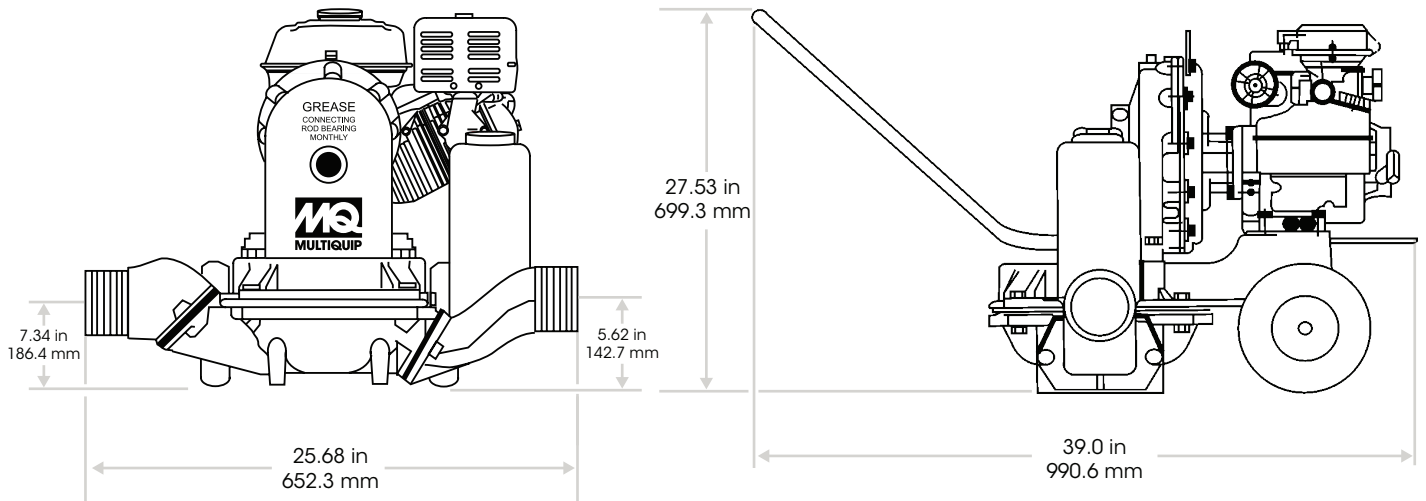

## SPECIFICATIONS

### PUMP SPECIFICATIONS

MODEL	MQD2HA
TYPE	DIAPHRAGM PUMP
MAX. PUMP CAPACITY	50 GALLONS/MIN (189 L/MIN)
MAX. SUCTION	25.0 FT (7.62 M)
MAX. HEAD	25.0 FT (7.62 M)
SUCTION/DISCHARGE PORT SIZE	2.00 IN (50.8 MM)
THREAD TYPE	NPT (MALE)
PSI	10.9
DIAPHRAGM MATERIAL	THERMOPLASTIC SANTOPRENE (TPE)
GEAR BOX	OIL BATH
PUMP CASING MATERIAL	SAND-CAST ALUMINUM
CHECK VALVE MATERIAL	NEOPRENE RUBBER
GEAR OIL TYPE	API GL-5 AND MIL-L-2105B
SALT OR CHEMICALS	NO
PUMP HARDWARE	STEEL
MAXIMUM FLUID TEMPERATURE	180° F (82° C)
MAXIMUM SOLID HANDING	1.25 IN. (31.75 MM)
PLUNGER BEARING	NEEDLE
STRAINER SIZE	2.00 IN. (50.8 MM) NPT
STRAINER INLET SIZE	0.375 IN. (9.5 MM)

### ENGINE SPECIFICATIONS

MAKE/MODEL	HONDA/GX120
EMISSIONS	EPA CERTIFIED AND CARB PREEMPT
STARTING METHOD	RECOIL START
DESIGN	AIR-COOLED, 4 STROKE, SINGLE CYLINDER, OHV, HORIZONTAL SHAFT
DISPLACEMENT	119 CC (7.2 CU-IN)
BORE X STROKE	2.4 IN. X 1.7 IN. (60 MM X 42 MM)
HORSE POWER (kW)	3.5 (2.6)
ENGINE SPEED	2,850 RPM
GOVERNOR SPEED	CENTRIFUGAL MASS TYPE
SOUND LEVEL dB(A) AT 23 FT	84
AIR CLEANER	DUAL ELEMENT
LUBRICATION SYSTEM	SPLASH
SPARK ARRESTOR	OPTIONAL
OIL CAPACITY	0.63 QUARTS (0.60 LITERS)
OIL TYPE	SAE 10W-30
LOW OIL SHUT-DOWN	STANDARD

### FUEL SPECIFICATIONS

RECOMMENDED FUEL	UNLEADED GASOLINE
FUEL TANK CAPACITY	0.7 GALLONS (2.65 LITERS)
FUEL CONSUMPTION	0.26 GPH (0.98 LPH)
RUN TIME	2.7 HOURS

### WEIGHT AND DIMENSIONS

DRY WEIGHT	140.0 LB. (63.5 KG)
DIMENSIONS	39.0 x 25.68 x 27.53 IN. (990.6 x 652.3 x 699.3 MM)

## OPTIONS

### SUCTION HOSES

- **HS220C** – 2" x 20 ft., 65psi, rigid PVC helix reinforced, NPS thread
- **HSQ220C** – 2" x 20 ft., 65psi, rigid PVC helix reinforced, NPT thread, Male Camlock, includes one quick disconnect coupler
- **HS225C** – 2" x 25 ft., 65psi, rigid PVC helix reinforced, NPS thread
- **HSQ225C** – 2" x 25 ft., 65psi, rigid PVC helix reinforced NPT thread, Male Camlock, includes one quick disconnect coupler
- **A200A** – 2" type A coupler, male quick disconnect x female NPT



HS220C and HS225C

HSQ220C and HSQ225C

### DISCHARGE HOSES

- **HD250C** – 2" x 50 ft., 75psi, NPS thread
- **HDQ250C** – 2" x 50 ft., 75psi NPT thread, includes one quick disconnect coupler
- **A200A** – 2" type A coupler, male quick disconnect x female NPT



HD250C

HDQ250C

A200A

**NOTICE** Features and Specifications are subject to change without notice.