



NGA150SSPUL


Generator

WhisperWatt™ 150

Prime Rating — 120 kW (150 kVA)

Standby Rating — 132 kW (165 kVA)

3-Phase, 60 Hertz, 0.8 PF

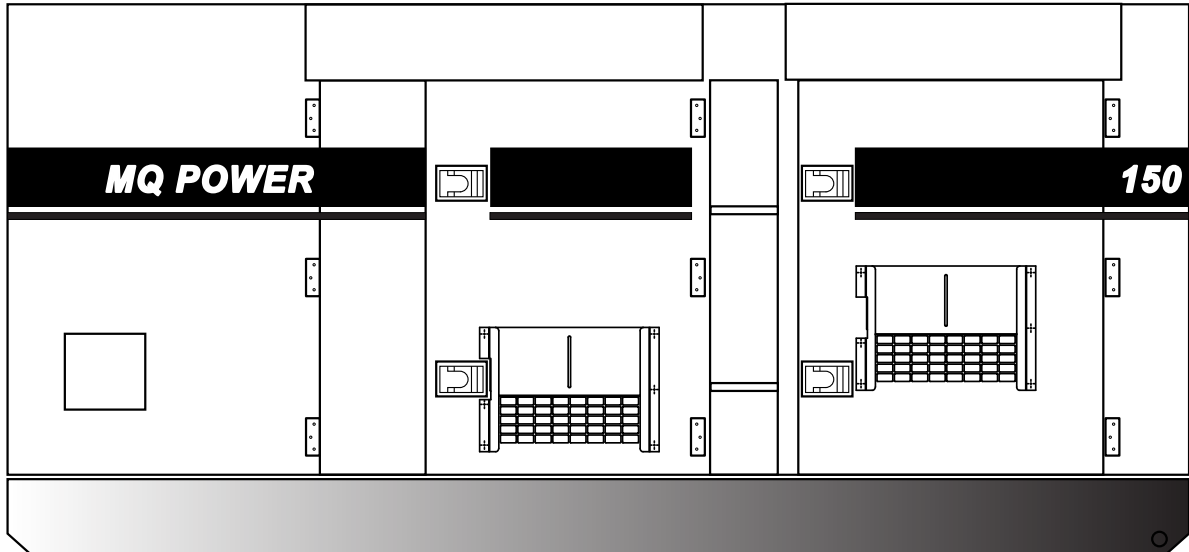

STANDARD FEATURES

- Heavy duty, in-line 4-cycle, turbocharged, charged after-cooled, natural gas engine provides maximum reliability.
 - Replaceable wet liners
 - Water-cooled exhaust
- Engine ECU integrates critical functions including:
 - Engine speed governor
 - Variable ignition timing
 - Air/fuel ratio control
 - Knock suppression
 - Engine protection
- EPA emission certified.
- Microprocessor engine control system maintains frequency to $\pm 0.25\%$
- Full load acceptance of standby nameplate rating in a single step.
- Multi-stage, water-coalescing filter, to remove solids and liquids from the gas supply, providing enhanced operation with reduced operating and maintenance costs.
- Sound attenuated, weather resistant, steel housing provides operation at 69 dB(A) at 23 feet. Fully lockable enclosure allows safe unattended operation.
- E-coat primer and powder coat paint provides durability and weather protection.
- Brushless alternator reduces service and maintenance requirements and meets temperature rise standards for Class F insulation systems.
 - Open delta alternator design provides virtually unlimited excitation for maximum motor starting capability.
 - Automatic voltage regulator (AVR) provides precise regulation.
- Basler DGC2020HD microprocessor-based digital generator controller with integrated genset-to-genset (isolated bus) paralleling.
 - Onboard Synchronization and kW/kVAR load sharing. Dual Ethernet ports for Inter-Genset communication.
 - High visibility backlit LCD display.
 - Operational temperature range of -40° to 70° C (-40° to 158° F).
 - Remote 2-wire start/stop control.
 - Metered power output parameters include:
 - Voltage
 - Amperage
 - Kilowatts
 - Kilovolt amps
 - Power Factor
 - Hertz
 - Modbus interface for gauge panel and expansion options.
 - Engine monitoring data over J1939. Modbus over RS485 for SCADA Interface.
 - 12 Contact Outputs for flexible customer alarm configurations.
- Battery Disconnect Switch.



NGA150SSPUL

Generator

SPECIFICATIONS

Generator Specifications		
Design	Revolving field, self-ventilated Drip-proof, single bearing	
Armature Connection	Star with Neutral	Zig Zag
Phase	3	Single
Standby Output	132 KW (165 KVA)	95 KW
Prime Output	120 KW (150 KVA)	87 KW
3Ø Voltage (L-L/L-N) Voltage Selector Switch at 3Ø 240/139	208Y/120, 220Y/127, 240Y/139	N/A
3Ø Voltage (L-L/L-N) Voltage Selector Switch at 3Ø 480/277	416Y/240, 440Y/254, 480Y/277	N/A
1Ø Voltage (L-L/L-N) (Voltage Selector Switch at 1Ø 240/120)	N/A	240/120
Power Factor	0.8	1.0
Voltage Regulation (No load to full load)	±0.5%	
Generator RPM	1800	
Frequency	60 Hz	
Winding Pitch	2/3	
No. of Poles	4	
Excitation	Brushless with AVR	
Frequency Regulation: No Load to Full Load	Isochronous under varying loads from no load to 100% rated load	
Frequency Regulation: Steady State	±0.25% of mean value for constant loads from no load to full load.	
Insulation	Class F	
Sound Level dB(A) Full load at 23 feet	69	

Engine Specifications	
Make / Model	PSI HD / NGE 8.1 CAC
Emissions	EPA Certified
Starting System	24 VDC Electric Starter Motor
Design	4-cycle, water cooled, turbocharged, charged air cooled
Displacement	492 in ³ (8.1 liters)
No. cylinders	6
Bore x Stroke	4.37 x 5.47 in. (111 x 139 mm)
Gross Engine Power Standby Rating (Flywheel)	
Natural Gas	239 hp (178 kW)
LP Gas	164 hp (122 kW)
Gross Engine Power Prime Rating (Flywheel)	
Natural Gas	200 hp (149 kW)
LP Gas	164 hp (122 kW)
BMEP Prime Power Rating (Natural Gas)	178 psi (12kPa)
Piston Speed	1641 Ft/min (8.34 m/s)
Compression Ratio	10.5:1
Engine Speed	1800 rpm
Overspeed Limit	2070 rpm
Oil Capacity (w/ filter)	7.1 gallons (27 liters)
Battery Voltage	24VDC/Group 27 x 800CCA x 2
Battery Charging Alternator	45 Amps

Fuel System		
Recommended Fuel	Low-pressure, dry-processed natural gas; approved oilfield well-head natural gas	
Minimum Nat-Gas Supply Pipe Size	1 1/4 in NPT	
Maximum Operating Pressure to EPR	11 in/H ₂ O (2.7 kPa)	
Minimum Operating Pressure to EPR	7 in/H ₂ O (1.7 kPa)	
NG Inlet Pressure	15 - 40 PSI	
Fuel Consumption (Natural Gas)	ft ³ /hr	m ³ /hr
At full load	1169	33.1
At 3/4 load	969	27.4
At 1/2 load	607	17.2
At 1/4 load	430	12.2

Cooling System	
Fan Load	8.0 hp (5.9 kW)
Coolant Capacity (with radiator)	17.5 gallons (80 liters)
Coolant Flow Rate (per minute)	63 gallons (240 liters)
Heat Rejection to Coolant (per minute)	9357 Btu/min (39.3 Kcal/sec)
Ambient Temperature Rating	104°F (40°C)

Air	
Combustion Air	355 cfm (10 m ³ /min)
Maximum Air Cleaner Restriction	15 in. H ₂ O (3.74 kPa)
Alternator Cooling Air	1352 cfm (38.3 m ³ /min)
Radiator Cooling Air	3853 cfm (109.1 m ³ /min)

Exhaust System	
Gas Flow (full load)	1129 cfm (31.96 m ³ /min)
Maximum Turbine Inlet Temperature	1382°F (750°C)
Maximum Allowable Back Pressure	40.8 in. H ₂ O (10.2 kPa)

Amperage	
Rated Voltage	Maximum Amps
1Ø 120 Volt	333.3 Amps (4 wire) 361 Amps x 2 (Zigzag)
1Ø 240 Volt	166.7 Amps (4 wire) 361 Amps (Zigzag)
3Ø 240 Volt	361 Amps
3Ø 480 Volt	180 Amps
Main Line Circuit Breaker Rating	400 Amps
Over Current Relay Trip Set Point 480V Mode Only	180 Amps

WARRANTY*

PSI HD Engines

12 months from date of purchase with unlimited hours.

Generator

24 months from date of purchase or 2000 hours (whichever occurs first).

Trailer

12 months excluding normal wear items.

*Refer to the express written, one-year limited warranty sheet for additional information.



NGA150SSPUL

Generator

MQ POWER DECIBEL LEVELS


Our soundproof housing allows substantially lower operating noise levels than competitive designs. WhisperWatts are at home on construction sites, in residential neighborhoods, and at hospitals — just about anywhere.

- 90 — Subway / truck traffic
- 80 — Average city traffic
- 70 — Inside car at 60 mph
WhisperWatt at 23 feet
- 60 — Air conditioner at 20 feet
- 50 — Normal conversation



GENERATOR OUTPUT PANEL

CIRCUIT BREAKERS FOR GFCI RECEPTACLES

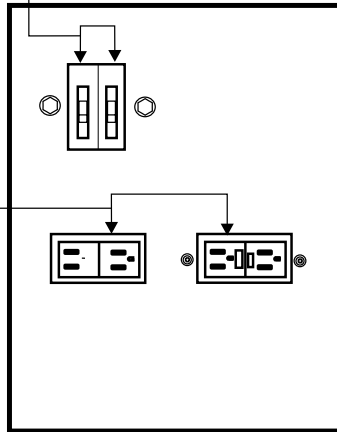

GFCI RECEPTACLES (2)
120V, 20 AMP

OPTIONAL GENERATOR FEATURES

- **Parallel Controls** — provides the ability to connect multiple generators together into a single power generation system.
- **8-Gallon oil replenishment tank** — allows for extended runtimes between service intervals.
- **Battery charger** — provides fully automatic and self-adjusting charging to the generator's battery system.
- **Trailer mounted package** — highway legal trailer with electronic or surge brakes on all axles.

OPTIONAL CONTROL FEATURES

- **Audible alarm** — alerts operator of abnormal conditions.
- **Emergency stop switch** — when manually activated, shuts down generator in the event of an emergency.


OPTIONAL OUTPUT CONNECTIONS

- **Cam-Loks** — provides quick disconnect alternative to bolt-on connectors.
- **Pin and Sleeve Connectors** — provides industry standard connectors for all voltage requirements.
- **Output Cable** — available in any custom length and size configuration.




NGA150SSPUL Generator

SKID-MOUNT DIMENSIONS

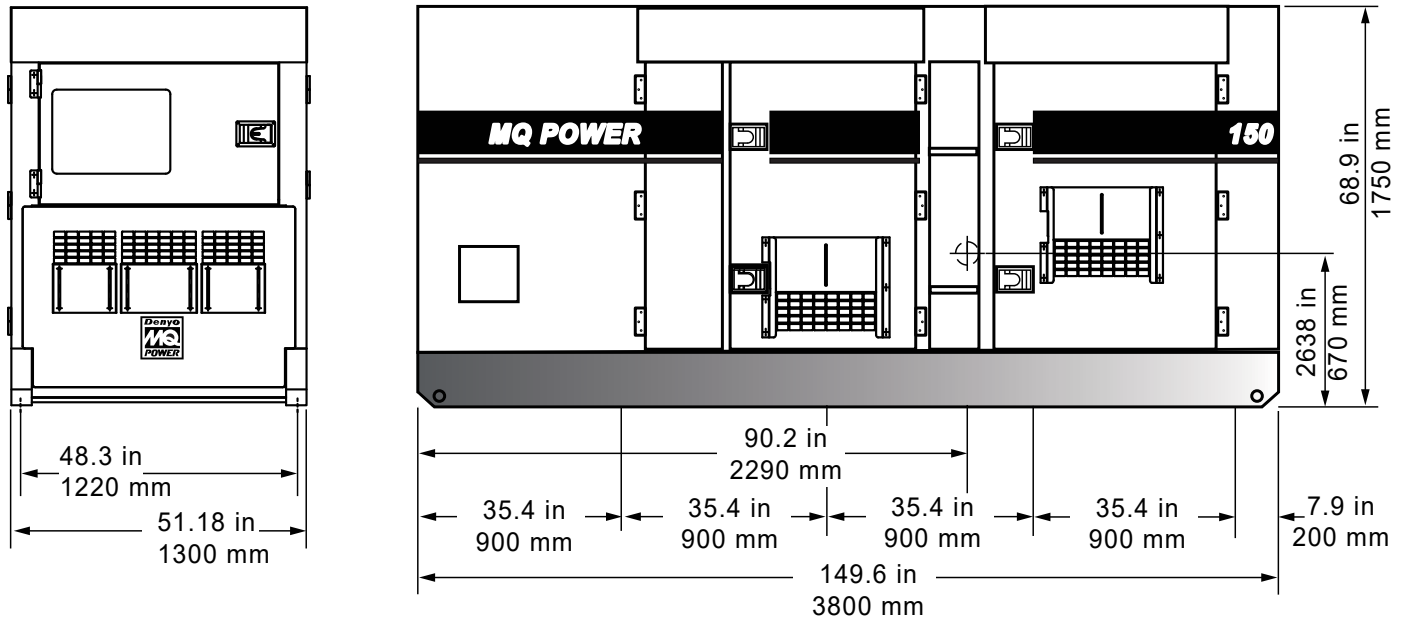

TRAILER-MOUNT DIMENSIONS

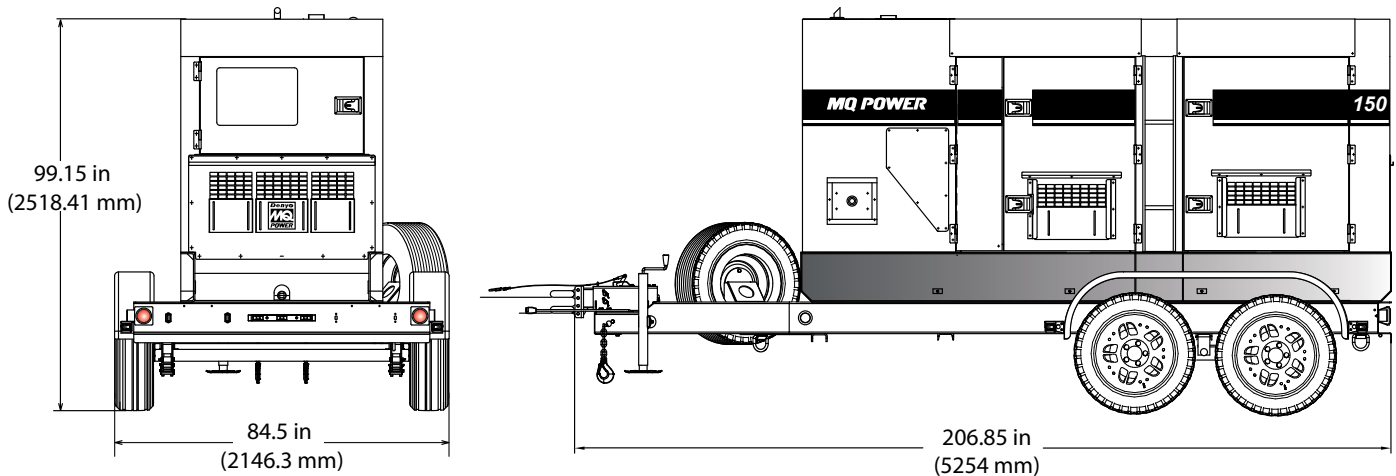

NGA150SSPUL Weights*

Dry Weight	6,872 lbs. (3,117 kg)
Wet Weight	7,203 lbs. (3,267 kg)
Max. Lifting Point Capacity	14,050 lbs. (6,373 kg)

* Weights do not include options.

NGA150SSPUL and TRLR150H Weights*

Dry Weight (with TRLR150H)	8,575 lbs. (3,890 kg)
Wet Weight (with TRLR150H)	8,906 lbs. (4,040 kg)

Generator can be placed on MQ Trailer Model TRLR150H and TRLR150E.

NOTICE

Features and Specifications are subject to change without notice.



MULTIQIP
6141 Katella Avenue Suite 200
Cypress, CA 90630
310-537-3700
E-MAIL: mq@multiquip.com
WEBSITE: www.multiquip.com