



# QP2H

MULTIQUIP® 2" Centrifugal Pump

## GALLONS PER MINUTE

**158 (598 L)**

## HEAD

**115 ft (35 M)**

## ENGINE

**Honda GX120**



## APPLICATIONS

Agricultural - Construction Sites - Emergency Response - Excavation - Farms - Floods - Irrigation - Jobsite - Drainage - Mining - Municipalities - Standing Water - Swimming Pools - Quarries - Water Departments - Water Supply from Lakes/Rivers - Water Trailers/Trucks

## STANDARD FEATURES

- Maximum pumping capacity of **158 gallons (598 liters) per minute.**
- Maximum lift of **25 feet (7.6 meters).**
- Aluminum body with cast-iron fittings.
- **High-Efficiency impeller** and volute for maximum fluid transfer.
- Cast Iron impeller and volute for abrasion resistance/long life.
- Silicon carbide mechanical seal provides **extreme abrasion resistance** and **high temperature operation.**
- **Discharge port rotates 180°** for hose orientation.
- 1" (25.4 mm) diameter fill and drain ports.
- Engine oil-alert to protect the engine in the case of low engine oil.
- Heavy-duty **1" (25.4 mm) tubular steel frame** for transportation and pump protection.

## WARRANTY\*


QP2H: 24 months from date of purchase.

Honda GX120 Engine: 36 months from date of purchase.

Hoses: 3 months from date of purchase.

\*Refer to the MULTIQUIP NEW PRODUCT LIMITED WARRANTY FOR FULL TERMS AND CONDITIONS.


**FEATURES**

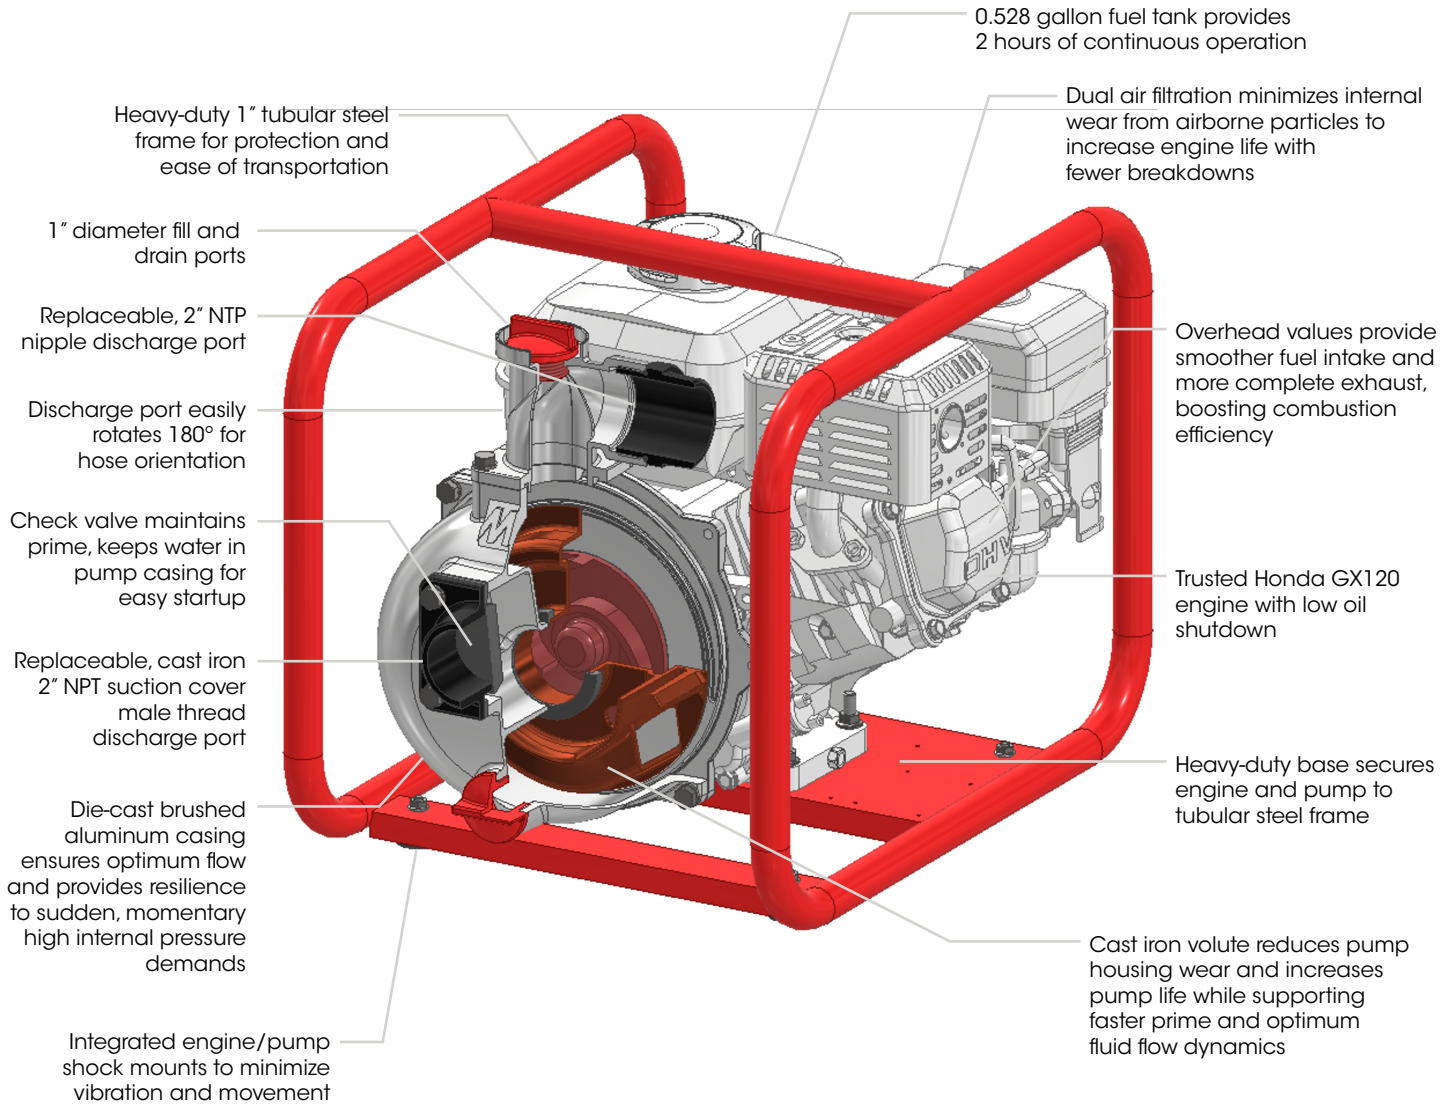


© COPYRIGHT 2026 MULTIQUIP INC. (REV 03172026)



**PUMP CURVE**

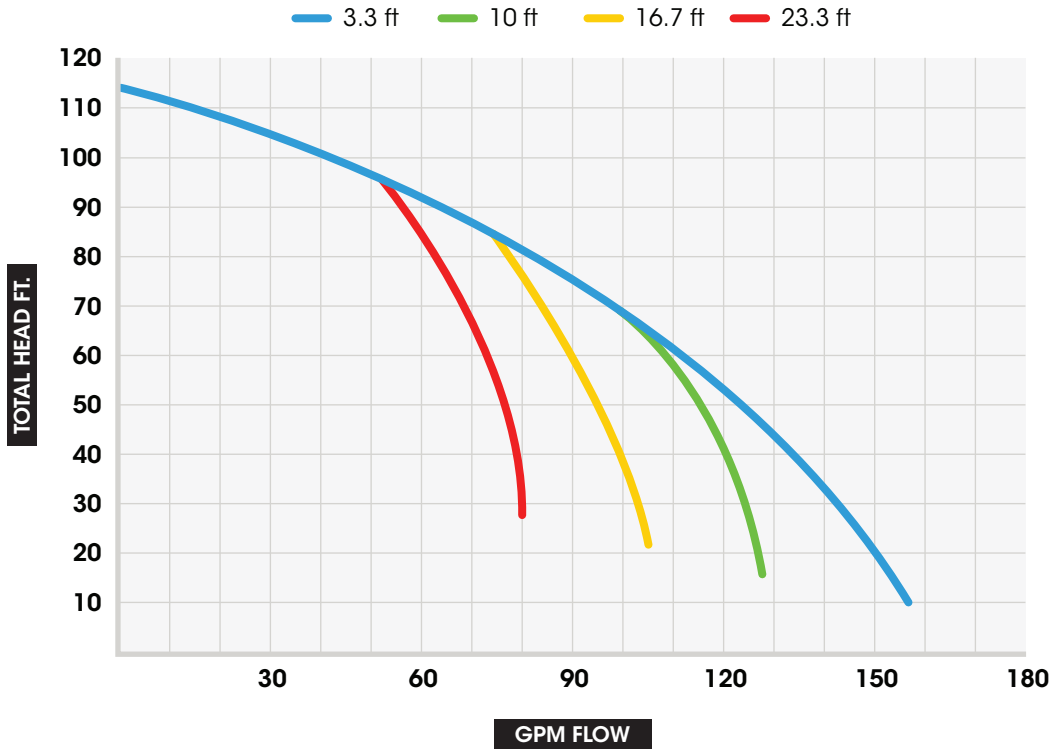

**PUMP DIMENSIONS**

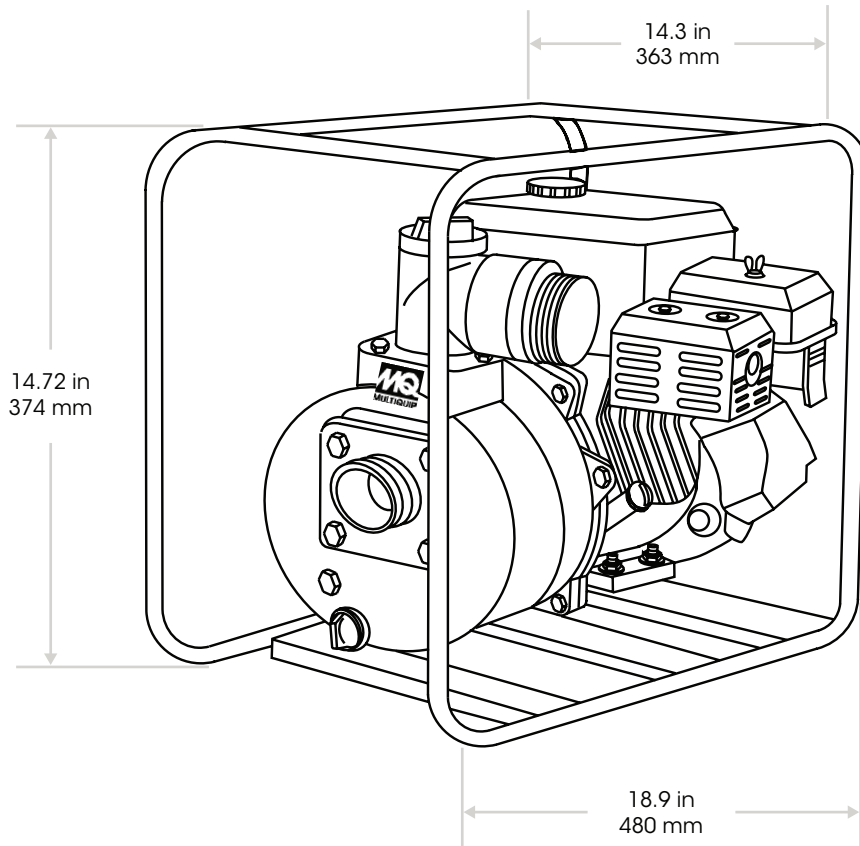

## SPECIFICATIONS

### PUMP SPECIFICATIONS

MODEL	QP2H
TYPE	CENTRIFUGAL PUMP
IMPELLER TYPE	SEMI-OPEN
MAX. PUMP CAPACITY	158 GALLONS/MINUTE (598 L/MIN)
MAX. SUCTION	25 FT (7.62 M)
MAX. HEAD	115.5 FT (35.2 M)
SUCTION/DISCHARGE PORT SIZE	2 IN (50.8 MM)
THREAD TYPE	NPT (MALE)
PSI	50.0
IMPELLER MATERIAL	CAST IRON
VOLUTE MATERIAL	CAST IRON
PUMP CASING MATERIAL	DIE-CAST ALUMINUM
CHECK VALVE MATERIAL	NITRILE BUTADIENE RUBBER
MECHANICAL SEAL MATERIAL	SILICON CARBIDE/304 STAINLESS STEEL
DRAIN AND FILL CAP MATERIAL	ACRYLONITRILE BUTADIENE STYRENE
SALT OR CHEMICALS	NO
PUMP HARDWARE	STEEL
MAX. FLUID TEMPERATURE	104° F (40° C)
MAX. SOLID HANDLING	0.33 IN (8.5 MM)
O-RINGS	NITRILE BUTADIENE RUBBER
STRAINER SIZE	2 IN (50.8 MM) NPT
STRAINER INLET SIZE	0.33 IN (8.5 MM)

### ENGINE SPECIFICATIONS

MAKE/MODEL	HONDA/GX120
EMISSIONS	EPA CERTIFIED AND CARB PREEMPT
STARTING METHOD	RECOIL START
DESIGN	AIR-COOLED, 4 STROKE, SINGLE CYLINDER, OHV, HORIZONTAL SHAFT
DISPLACEMENT	122 CC (7.4 CU-IN)
BORE X STROKE	2.4 IN X 1.7 IN (60 MM X 43.5 MM)
HORSE POWER (kW)	3.2 (2.4)
ENGINE SPEED	3,600 RPM
GOVERNOR SPEED	MECHANICAL
SOUND LEVEL dB(A) AT 23 FT	84
AIR CLEANER	DUAL ELEMENT
LUBRICATION SYSTEM	SPLASH
SPARK ARRESTOR	OPTIONAL
OIL CAPACITY	0.59 QUARTS (0.56 LITERS)
OIL TYPE	SAE 10W-30
LOW OIL SHUT-DOWN	STANDARD

### FUEL SPECIFICATIONS

RECOMMENDED FUEL	UNLEADED GASOLINE
FUEL TANK CAPACITY	0.528 GALLONS (2.0 L)
FUEL CONSUMPTION	0.26 GPH (0.96 LPH)
RUN TIME	2 HOURS

### WEIGHT AND DIMENSIONS

DRY WEIGHT	52.9 LB (24 KG)
DIMENSIONS	18.9 x 14.3 x 14.72 IN (480 x 363 x 374 MM)

## OPTIONS

### SUCTION HOSES

- **HS220C** – 2" x 20 ft., 65psi, rigid PVC helix reinforced, NPS thread
- **HSQ220C** – 2" x 20 ft., 65psi, rigid PVC helix reinforced, NPT thread, Male Camlock, includes one quick disconnect coupler
- **HS225C** – 2" x 25 ft., 65psi, rigid PVC helix reinforced, NPS thread
- **HSQ225C** – 2" x 25 ft., 65psi, rigid PVC helix reinforced, NPT thread, Male Camlock, includes one quick disconnect coupler
- **A200A** – 2" type A coupler, male quick disconnect x female NPT



HS220C and HS225C

HSQ220C and HSQ225C

### DISCHARGE HOSES

- **HD250C** – 2" x 50 ft., 75psi, NPS thread
- **HDQ250C** – 2" x 50 ft., 75psi, NPT thread, includes one quick disconnect coupler
- **A200A** – 2" type A coupler, male quick disconnect x female NPT



HD250C

HDQ250C

A200A

### FILTER KIT

**MKITPUMP-4** – (1) Air cleaner element, (1) spark plug, (5) flooding caps



**NOTICE** Features and Specifications are subject to change without notice.